


| | |
|-------------------------------------|--|
| Nominal Voltage: | 1.5 V |
| Operating Voltage | 1.6 - 0.75V |
| Impedance: | 150 m-ohm @ 1kHz |
| Typical Weight: | 69 gm (2.4 oz.) |
| Typical Volume: | 26.9 cm ³ (1.6 in. ³) |
| Terminals: | Flat |
| Storage Temperature Range: | -20 °C to 35 °C |
| Operating Temperature Range: | -20 °C to 54 °C (-4 °F to 130 °F) |
| ANSI: | 14A |
| IEC: | LR14 |

TYPICAL DISCHARGE CHARACTERISTICS AT 21 °C (70 ° F)

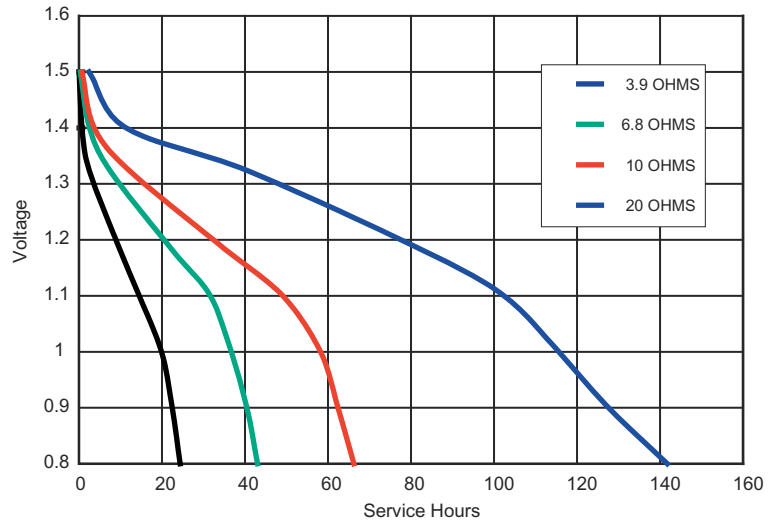


DURACELL[®]

BATTERIES


Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
Internet: www.duracell.com

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.


TYPICAL DISCHARGE CHARACTERISTICS
AT 21°C (70°F)

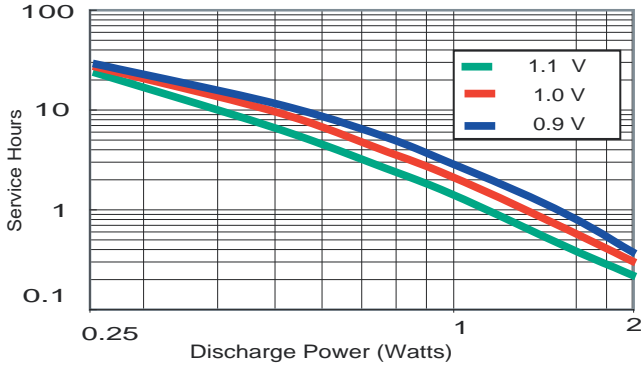


TYPICAL DISCHARGE CHARACTERISTICS
AT 21°C (70°F)

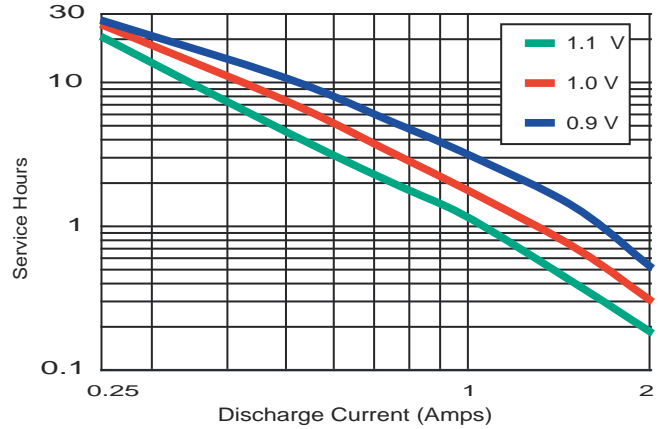


TYPICAL DISCHARGE CHARACTERISTICS
AT 21°C (70°F)

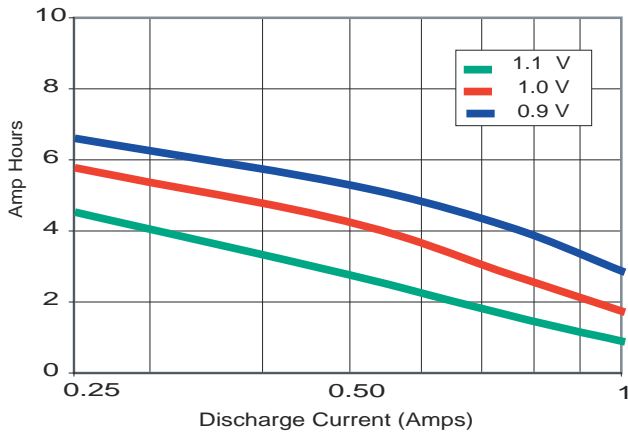

TYPICAL DISCHARGE CHARACTERISTICS
AT 21°C (70°F)

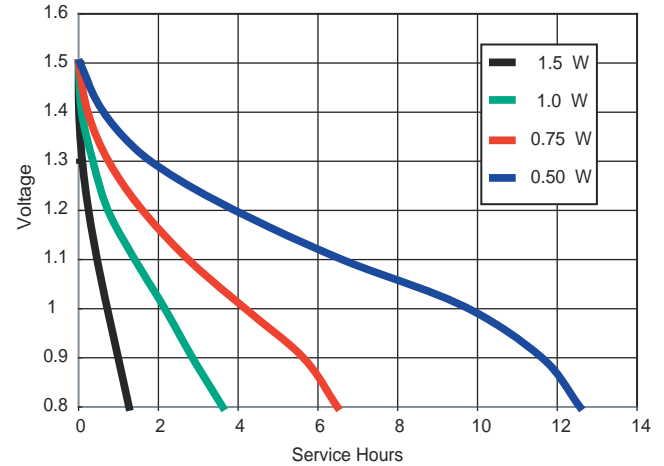

TYPICAL FLASHLIGHT TEST
AT 21°C AND 0°C

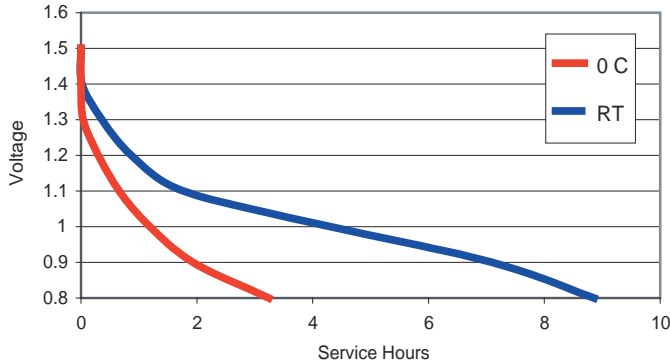

DURACELL®
BATTERIES

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
Internet: www.duracell.com

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.